

DRIFT LED



Napěťový elektronický transformátor k napájení LED svítidel




● DRIFT LED 0-30W

● DRIFT LED 0-6W


● DRIFT LED 3-18W

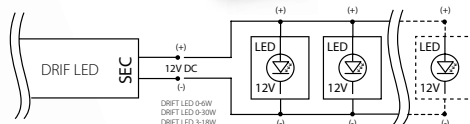

DRIFT LED 0-6W



DRIFT LED 3-18W



DRIFT LED 0-30W

● těleso: plast

Kanlux		EAN 		PRI	SEC	T _a max [°C]	T _c max [°C]			DKC CZ bez DPH
DRIFT LED 0-6W	18040	5905339180407	bílá	220-240V~; 50/60Hz	DC 0,5A (12V); 0...6W	45	80	1/-/180	31	273 Kč
DRIFT LED 3-18W	08550	5905339085504	bílá	220-240V~; 50/60Hz	DC 1,5A (12V); 3...18W	50	85	1/-/100	100	298 Kč
DRIFT LED 0-30W	18041	5905339180414	bílá	220-240V~; 50/60Hz	DC 2,5A (12V); 0...30W	45	75	1/-/84	156	516 Kč

- stabilizace napětí 12V DC
- maximální přípustná teplota tělesa transformátoru je T_c: 85°C
- ochrana proti přetížení a proti zkratům

- model DRIFT LED 0-6W a 0-30W obsahuje příводы 0,75mm² o délce 15cm
- model DRIFT LED 3-18W se připojuje pomocí svorkovnice 0,5-1,5mm²

