



WOOD AND GLASS SHELVING SYSTEMS



SYMBOLS AND FINISHES LEGEND

SYMBOLS



= SHELF SAFELY LOCKED DURING TRANSPORTATION AND AT HOME.



= ANTI-TURNOVER LOCKING SYSTEM



= NORMS / PATENTS



= PHILLIPS / POZIDRIV



= NEWTON



= PART.NO



= HEXAGONAL SOCKET



= FRICTION



= PCS. PER PACKAGE



= BLADE SLOT



= AUTOMATIC



= COMBI SLOT



= DROP DOWN



= CAPACITY LOADING



= COUNTERSUNK HEAD



= STANDARD HINGE



= WOOD / GLASS THICKNESS



= PAN HEAD





= HOLE DIAMETER



= FLANGE HEAD



= KIMANA HINGE



= DIAMETER



= FLAT HEAD



= FLAP HINGE



= LENGTH



= TRILOBULAR SCREW



= WITH SPRING



= HEIGHT



= SELF-TAPPING SCREW



= WITHOUT SPRING



= RIGHT VERSION



= EURO THREAD

= METRIC THREAD



= REVERSED SPRING



= LEFT VERSION



= PRE-INSERTED SCREW



= FOR ROUND TUBE



= PCS. PER PAD



= PRE-INSERTED SCREW AND SPREADING BUSH



= FOR OVAL TUBE



= CUT ON REQUEST



= WITH BUFFER





= WITH FLANGE



= SELF ADHESIVE



MATERIALS






HSS = High Speed Steel



ABS = Acrylonitrile
Butadiene Styrene



STzk = Zinc-plated Steel

AL = Aluminium

(WD) = Wood

EVA = Ethylene Vinyl Acetate



= ENGINEERING PLASTIC

+ EP = other engineering plastic available on request

SR = SOFT RUBBER



(EPn) = Natural Engineering Plastic

EPc = Clear Engineering Plastic


SRn = Natural Soft Rubber

EPw = White Engineering Plastic

EPg = Grey Engineering Plastic

SRW = White Soft Rubber

EPwg = Water Green Engineering Plastic





FINISHES



= OTHER FINISHES AVAILABLE ON REQUEST

PART. NO	FINISHES	PART. NO	FINISHES	PART. NO	FINISHES
AA	Natural	JB	Bright Aluminium	PZ	Beech
AB	White	JC	Aluminium - Chrome	QA	Maple
AC	Opal White	JD	Matt Aluminium	QB	Walnut
AE	White 9010	JE	Satin-finished Aluminium	WA	Bronzed
AK	Champagne	JF	Aluminium - Brass	WI	Burnished
AL	lvory	JG	Aluminium 5	XD	Satin-finished Steel
EA	Black	JL	Aluminium PE 11	YA	Nickel-plated
EB	Glossy Black	JM	Aluminium RAL 9006	YB	Bright Nickel-plated
EC	Matt Black	KA	Chrome	YC	Matt Nickel-plated
GR	Raw	KB	Bright Chrome	YD	Satin-finished Nickel-plated
НА	Brass-Plated	KC	Matt Chrome	ZA	Zinc alloy
НН	Tropicalized	MA	Brown	ZN	Zinc-plated
HL	Raw Brass	MB	Light Brown 1	ZQ	Bright Gold
IA	Grey	NN	Metallic Beige	ZY	Titanum
IB	Metallic Grey	NO	Beige	ZZ	Clear
IF	Middle Grey	OA	Oak	00	Insignificant finish
IJ	Light Grey	OZ	Ash		
IL	Grey 20	PA	Light Ash		
JA	Aluminium	PY	Cherry		



COBRONE

Shelf support for glass shelves 5 to 10mm thick.

The capacity loading is 3Kg each (glass shelf weight included) for a shelf 150mm deep.

Zinc alloy Engineering plastic





INSTALLATION AND ADJUSTMENTS

WOOD PANEL



Recommended fixing countersunk screw type - head \varnothing 5 mm max.

SOLID AND PLASTERBOARD WALLS




It is the responsability of the customer:

- to ensure the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.


For more specific information, please refer to the WARNINGS section at the end of the catalogue.

ASSEMBLING WITHOUT ADAPTER FOR GLASS 10 mm THICK



shelf locking

ASSEMBLING WITH ADAPTER FOR GLASS 8 mm THICK




shelf locking

BRACKET ALIGNMENT




ASSEMBLING WITH ADAPTER FOR GLASS 5-6 mm THICK





shelf locking

COMBINATION SHELF LOAD AND SHELF DEPTH

(The figures refer to 1 shelf support)











Metric insert in engineering plastic Cross PZ2 screwdriver.

























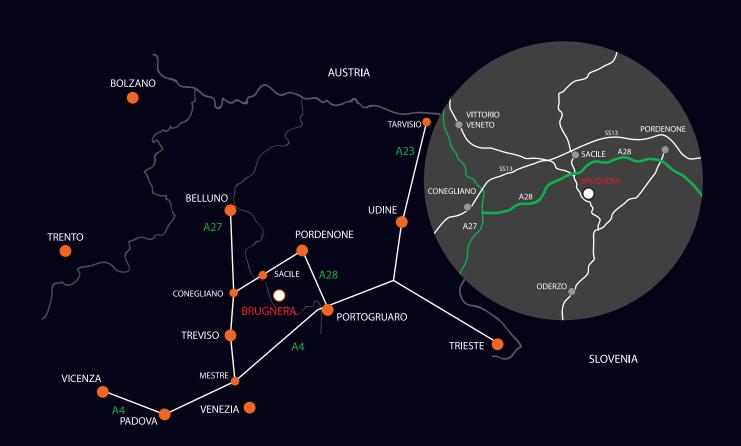



www.italianaferramenta.com